

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
25 March 2004 (25.03.2004)

PCT

(10) International Publication Number  
**WO 2004/024561 A1**

(51) International Patent Classification:  
F24F 5/00

B64F 1/00,

(74) Agents: SCHMITT, Armand et al.; Office Ernest T.  
Freylinger S.A., B.P. 48, 8001 Strassen (LU).

(21) International Application Number:

PCT/EP2003/050625

(22) International Filing Date:

15 September 2003 (15.09.2003)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

90 967

16 September 2002 (16.09.2002) LU

(71) Applicant (for all designated States except US): IPALCO  
B.V. [NL/NL]; Ohmweg 17, NL-2952 Alblasserdam Bd  
(NL).

(72) Inventor; and

(75) Inventor/Applicant (for US only): WIDEGREN,  
Michael [SE/DE]; Oberhochstadter Strasse 16, 61440  
Oberursel (DE).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE,  
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,  
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK,  
MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT,  
RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR,  
TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,  
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: DEVICE FOR SUPPLYING PRECONDITIONED AIR TO AN AIRCRAFT ON THE GROUND

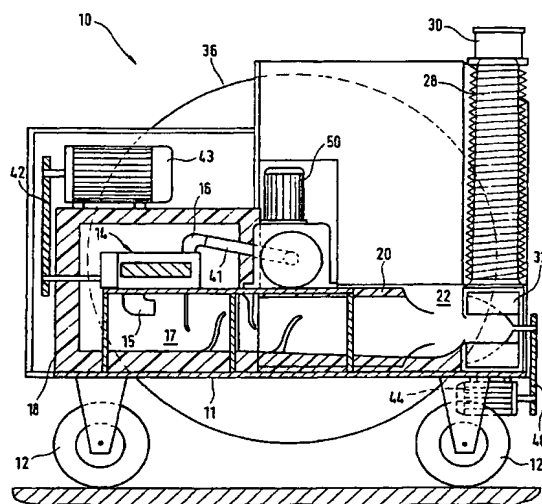

(57) Abstract: A device (10) for supplying preconditioned air to an aircraft on the ground, comprises a compressed air inlet (16) and a compressed air hose (34) having a first end connected to the compressed air inlet (16) and an opposite second end for connection to a remote, ground-based, compressed air unit. Expander means (14) are situated downstream of the compressed air inlet (16) for allowing the compressed air to expand to lower pressure and temperature. The device (10) further includes an ambient air inlet (24) and a mixing chamber (22) downstream of the expander means (14) and communicating with the ambient air inlet (24), wherein mixing of ambient air with the expanded, cold air is controlled in such a way as to elaborate preconditioned air at the desired temperature. A connection hose (28) has a first end in communication with said mixing chamber and a second end to be connected to an aircraft on the ground.

## DEVICE FOR SUPPLYING PRECONDITIONED AIR TO AN AIRCRAFT ON THE GROUND

### FIELD OF THE INVENTION

The present invention generally relates to a device for supplying preconditioned air to an aircraft on the ground.

### BACKGROUND OF THE INVENTION

5 During the time an aircraft is parked on the ground, the on board air conditioning system is generally turned off, whereas the high density of passengers, the interior lighting, the large number of windows, and the heavily insulated fuselage all contribute to raising the temperature of the cabin to uncomfortable levels. Therefore, preconditioned air is conventionally supplied to the  
10 aircraft directly into the cabin ventilation system. This may be done by connecting the aircraft either to a remote air conditioning unit, or to a portable air conditioning unit, which is towed close to the aircraft.

When connecting the aircraft to a remote ground-based air conditioning unit, a long hose is used to deliver the preconditioned air to the aircraft. Such a  
15 hose may be about 300 mm in diameter and 20 to 30 m in length. The hose is connected at one end to a connector provided on the exterior of the fuselage and communicating with the cabin ventilation system. At its other end, the hose is connected to a preconditioned air outlet of an independent air conditioning unit or of the airport air conditioning system, the preconditioned air outlet being  
20 situated about the airport terminal building, e.g. about a boarding gate. Unfortunately, the large dimensions of the hose involves large pressure drops and temperature variations. Furthermore, handling and storage of the hose when not in use is difficult.

The use of portable air conditioning units, as e.g. described in  
25 US 5,031,690, that are towed close to the aircraft eliminates the problems

associated with long hoses, since a short hose is then employed. In such a portable air conditioning unit, the cooling function is generally provided by a conventional vapour cycle refrigerant system, wherein the refrigerant compressor is driven by a diesel engine. Ambient air is sucked in the air conditioning unit and caused to flow through the evaporator of the refrigerant system so as to extract heat from this air. A blower is employed to supply the cool, preconditioned air to the aircraft at the desired flow conditions. A disadvantage of such air conditioning units is their relatively complex conception, since they include a refrigerant system and a diesel engine to operate the refrigerant system.

5

10 Consequently, these units are relatively heavy and need to be either skid or truck mounted. In addition, exhaust gases from the diesel engine may be sucked into the air conditioning unit, which results in unpleasant odours for the passengers. Another disadvantage of such air conditioning units is that conventional vapour cycle refrigerant systems operate with CFCs, which are known

15 for their harmful effect on the environment.

## OBJECT OF THE INVENTION

The object of the present invention is to provide a simple and environmentally friendly device for supplying preconditioned air to an aircraft on the ground. This object is achieved by a device as claimed in claim 1.

## 20 SUMMARY OF THE INVENTION

According to the present invention, a device for supplying preconditioned air to an aircraft on the ground comprises a compressed air inlet and expander means downstream of the compressed air inlet for allowing the compressed air to expand to lower temperature and pressure, thereby obtaining cold air. A

25 mixing chamber, communicating with an ambient air inlet, is situated downstream of the expander means. In the mixing chamber, mixing of ambient air and cold, expanded air is controlled in such a way as to elaborate preconditioned air at the desired temperature. The device further comprises a connec-

tion hose, which has a first end in communication with the mixing chamber and a second end to be connected to a parked aircraft. It will be appreciated that the present device comprises a compressed air hose having a first end connected to the compressed air inlet and an opposite second end for connection  
5 to a remote, ground-based, compressed air unit. Hence, the compressed air used for the cooling effect is not produced within the device, but is supplied from a remote compressed air unit.

The present invention thus uses the so-called "air cycle" for producing preconditioned air. The use of air as a refrigerant is based on the principle that  
10 when a gas expands isentropically from a given temperature, its final temperature at the new pressure is much lower. In the present device, the resulting cold air is then directly used as a refrigerant in an open system. In other words, the cold air is not passed through a heat exchanger but introduced in the space to be cooled, i.e. the passenger cabin of the aircraft. It will also be noted that in  
15 the present device ambient air is mixed with the expanded cold air, which permits to increase the volume of preconditioned air that can be delivered to the aircraft and reduces the need on compressed air from the remote compressed air unit.

The cooling function in the present device is thus carried out by expanding  
20 ing compressed air, which is produced at a remote location (i.e. not in the device itself or in its vicinity). This eliminates the need—in the device itself—for a compressor and engine to drive the compressor. Consequently, the present device is lighter and of simpler conception than conventional portable air conditioning devices, such as e.g. that of US 5,031,690. This also means that  
25 the present device can be designed as a self-contained air-conditioner of lightweight and reduced dimensions that can be easily manipulated on the parking area. Furthermore, the present device proves advantageous in that (1) the working fluid is air, which is free, safe and non toxic; (2) the need for environmentally damaging refrigerant such as CFC, HCFC and the like is  
30 eliminated; and (3) air cycle equipment is extremely reliable, thereby reducing maintenance costs.

As mentioned, the compressed air used in the present device comes from a remote compressed air unit, e.g. installed in or next to the airport building, and is supplied to the device via the compressed air hose and enters into the device through the compressed air inlet. Compressed air may be supplied to the device at relatively high pressure and e.g. ambient temperature. The compressed air hose may have a relatively small diameter, e.g. of about 30 mm. It is to be noted that possible variations in temperature and pressure of the compressed air during to the transfer in the compressed air hose do not affect the preconditioned air temperature, as it is possible to compensate for such variations during the expansion and/or mixing process in the device.

The present device preferably comprises a rolling support. Due to its light weight, the device can easily be pulled by a ground technician and does not need to be towed. Alternatively, the device could be truck mounted.

In order to supply preconditioned air to the aircraft with desired flow conditions, namely of pressure and velocity, flow control means are advantageously provided upstream of the connection hose. Such flow control means may e.g. comprise a centrifugal fan or an ejector, installed e.g. on the downstream side of the mixing chamber.

In a preferred embodiment, the expander means is a turbine expander, a rotary screw expander, or a displacement expander. The expansive flow of the compressed air through the expander thus results in a pressure and temperature drop with production of external work. This external work can e.g. be turned into electric energy by coupling the expander to an electric generator. Alternatively, the expander may be coupled to an ambient air compressor to increase the performance of the device by compressing ambient air and introducing it into the expander. This will increase the total airflow through the air caddy and reduce the need for ground based compressor capacity. It will also dry out the incoming air, so that cool dry air is introduced into the aircraft.

The expander means preferably opens into an expansion chamber, through which the expanded, cold air flows before entering the mixing chamber.

The expander means and the expansion chamber are advantageously installed in an insulated casing. Depending on the efficiency of the insulation, the air in the expansion chamber may theoretically reach temperatures as low as  $-90^{\circ}\text{C}$  to  $-100^{\circ}\text{C}$  at atmospheric pressure. In the practice of the present invention, 5 temperatures of  $-20^{\circ}\text{C}$  to  $-40^{\circ}\text{C}$  are generally obtained.

In the mixing chamber, the cold air is preferably mixed with a quantity of ambient air required to elaborate preconditioned air at the desired temperature.

In order to facilitate handling of the compressed air hose that connects the compressed air inlet to the remote compressed air unit, the device advantageously comprises a rotatable reel, for winding and unwinding the compressed 10 air hose. The cable or hose assembly is wound up on the reel in such a way that it can be unwound from the second end.

In practice, when the device is not in use, it is stored nearby the compressed air unit to which the remote compressed air hose is connected, 15 generally close to the terminal building, with the compressed air hose almost completely wound on the reel. When preconditioned air is to be supplied to a parked aircraft, the device is moved close to the aircraft, while the hose is reeled out.

In a preferred embodiment, the device includes two compressed air 20 hoses, each connected to a compressed air inlet upstream of the expander means. This increases the cooling capacity of the device by increasing the quantities of air that can be supplied to the aircraft. In such a case, the device includes two rotatable reels, one for each compressed air hose.

The device further preferably comprises a gearbox connected to each reel 25 hub and capable of rotating the reel, so as to wind or unwind the compressed air hose. Each gearbox may be coupled to an electric motor. The electric power needed for operating the electric motor shall advantageously be produced by a generator coupled to the rotary screw expander. Alternatively, rotation of the hose reels can be obtained by coupling each reel to a hydraulic or pneumatic 30 motor. The reel movement is thus assisted, which simplifies the work of the

ground technician and ensures a proper handling of the hoses.

## BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will now be described, by way of example, with reference to the accompanying drawings, in which:

- 5 FIG. 1: is a partial vertical section view through a preferred embodiment of a device for supplying preconditioned air according to the present invention; and

FIG. 2: is a partial section view of the device of Fig.1.

## DETAILED DESCRIPTION OF A PREFERRED EMBODIMENT

- 10 A preferred embodiment of a device for supplying preconditioned air to an aircraft on the ground, generally indicated 10, is shown in Fig.1. The present device 10 is adapted to be brought next to a parked aircraft, in order to supply the latter with preconditioned air, i.e. cool air, to maintain the passenger cabin at comfortable temperature levels. The device 10 therefore advantageously
- 15 includes a rolling support 11, which comprises four wheels 12. Contrary to known portable air conditioning units, such as e.g. that described in US 5,031,690, the cooling function of the present device 10 does not use a vapour cycle refrigerant system, but operates on the "air cycle" principle. This is based on the fact that when a gas expands isentropically from a given
- 20 temperature, its final temperature at the new pressure is much lower.

Accordingly, the present device 10 includes an expander means, generally indicated 14, situated downstream of a compressed air inlet 16, through which compressed air is supplied to the device 10. By flowing through the expander means 14 the compressed air expands to lower temperature and

25 pressure. As can be seen in Fig.1, the expander means 14 has an outlet 15, which opens into an expansion chamber 17. In the present case, compressed air enters the expander means 14 at about ambient temperature and at a pressure of e.g. 3 to 10 bars or in the liquid state. The expansion chamber 17

and the expansion means 14 are preferably both mounted in an insulated casing 18. Depending on the quality of the insulation, the air temperature in the expansion chamber 17 may theoretically be as low as  $-90$  to  $-100^{\circ}\text{C}$  at atmospheric pressure. In practice, temperatures of  $-40$  to  $-20^{\circ}\text{C}$  are produced  
5 in the expansion chamber 17.

The cold air then flows from the expansion chamber 17, through a cold duct 20, into a mixing chamber 22 which communicates with a pair of ambient air inlets 24. Air filters 26 are preferably arranged in the ambient air inlets 24 to clean the ambient air entering the device 10. In the mixing chamber 22, the flow  
10 of ambient air is controlled in such a way as to mix the cold air with ambient air to elaborate preconditioned air at the desired temperature, generally of about  $+5^{\circ}\text{C}$ .

A flexible connection hose 28 is associated with the present device 10 in order to deliver the preconditioned air to the parked aircraft. Hence, the  
15 connection hose 28 has a first end provided with a connector 30 adapted for connection with a preconditioned air inlet on the aircraft fuselage; and a second end in communication with the mixing chamber 22. The air inlet on the fuselage communicates with the aircraft air ventilation system, so that the preconditioned air may be directly introduced in the passenger cabin. Such a connection hose,  
20 shown in its rest position in Fig.1, may e.g. be 2 to 3 m long (or more) and have a diameter of e.g. 300 mm.

It is to be noted that in present device 10 ambient air is mixed with the expanded cold air, which permits to increase the volume of preconditioned air that can be delivered to the aircraft and reduces the need on compressed air from  
25 the remote compressed air unit. Preferably, the mixing of the ambient air with expanded, cold air is carried out in such a way that the preconditioned air delivered to the aircraft consists of between 60 and 80%, more preferably 70%, of expanded cold air and the rest of ambient air.

Reference sign 32 indicates blower means, preferably a centrifugal  
30 blower, installed in the mixing chamber 22, on its downstream side. The blower



means 32 allows to control the flow of preconditioned air in the connection hose 28. By adjusting the centrifugal blower 32 operating conditions it is thus possible to provide the aircraft with preconditioned air having desired pressure and velocity. Although not shown in the Figures, the device 10 shall advantageously comprise an electronic control unit and sensors to monitor and adjust the mixing temperature and blowing conditions according to desired set-points.

It will be noted that the present device advantageously comprises at least one compressed air hose through which compressed air is supplied to the device 10 from a remote compressed air unit. In the present embodiment, the device 10 preferably comprises a pair of flexible compressed air hoses 34 communicating with the compressed air inlet 16. Each of these hoses 34 thus has a first end 36 communicating with the air inlet 16 and an opposite, second end connected to the compressed air unit (not shown), which is e.g. situated next to airport terminal building. The compressed air hoses 34 may be e.g. from 20 to 40 m in length and have an inner diameter of e.g. 30 mm.

To facilitate handling of the hoses 34, the device 10 advantageously comprises a rotatable reel 36 associated with each hose 34, for winding and unwinding the latter. In the present embodiment, one reel 36 is mounted on each side of the device 10. Each hose 34 is wound on the reel 36 in such a way that it can be unwound from its second end, i.e. the end which is connected to the compressed air unit. As can be seen in the Figures, the first end of the compressed air hose 34 preferably passes through the support drum 38 of the reel 36 and communicates with the compressed air inlet 16 via a compressed air swivel joint 40 and piping 41.

In practice, when the device 10 is not in use, it is stored nearby the compressed air outlet of the compressed air unit to which the compressed air hoses 34 are connected, generally close to the terminal building, with the compressed air hoses 34 almost completely wound on the reels 36. The hoses 34 are thus kept out of the way of aircrafts or other vehicles. When preconditioned air is to be supplied to a parked aircraft, the device 10 is pulled by a ground technician

next to the aircraft. As the technician pulls the device 10 towards the aircraft, the compressed air hoses 34 are reeled out. Hence, the hoses 34 are not dragged but laid on the ground as the device 10 is moved towards the aircraft, which avoids damaging the hoses 34 by abrasion.

5        It is to be noted that in the present embodiment, the expander means 14 preferably is a rotary screw expander, so that the expansion flow of the compressed air also results in the production of external work. This external work is turned into electrical energy by a generator 43 coupled to the turbine expander 14 by means of a belt 42.

10       The electricity produced by the generator 43 is then e.g. used to power an electric motor 44 coupled to the centrifugal blower 32 by means of a belt 46.

      Furthermore, this electricity is advantageously used to assist the rotation of the reels 36. Accordingly, each reel 36 is provided with a gearbox 48 and an electric motor 50 powered by the generator 43. An automatic winding or  
15    unwinding of the hoses 34 can thus be effected, which simplifies the work of the ground staff.

      Instead of the electric motors 50, it is possible to use compressed air motors, for driving the gearboxes 48 and the centrifugal blower 32.

      It remains to be noted that the device may further comprise an ambient air  
20    compressor (booster compressor) driven by the rotary screw expander 14, to compress ambient air coming e.g. from the ambient air inlet and inject the compressed ambient air into the rotary screw expander 14. This increases the airflow through the device 10 and allows to reduce the moisture in ambient air.

## LIST OF REFERENCE SIGNS

10	device
11	rolling support
12	wheel
14	expander means
15	expander outlet
16	compressed air inlet
17	expansion chamber
18	insulated casing
20	cold duct
22	mixing chamber
24	ambient air inlet
26	air filter
28	connection hose
30	connector
32	blower means
34	compressed air hose
36	rotatable reel
38	support drum
40	swivel joint
41	pipng
42	belt
43	generator
44	electric motor
46	belt
48	gearbox
50	electric motor


## Claims

1. A device for supplying preconditioned air to an aircraft on the ground, comprising:
  - a compressed air inlet;
  - a compressed air hose having a first end connected to said compressed air inlet and an opposite second end for connection to a remote, ground-based, compressed air unit;
  - expander means downstream of said compressed air inlet for allowing said compressed air to expand to lower pressure and temperature;
  - an ambient air inlet;
  - 10 a mixing chamber downstream of said expander means and communicating with said ambient air inlet, wherein mixing of ambient air with the expanded, cold air is controlled in such a way as to elaborate preconditioned air at the desired temperature;
  - a connection hose having a first end in communication with said mixing chamber and a second end to be connected to an aircraft on the ground.
- 15 2. The device according to claim 1, comprising flow control means upstream of said connection hose for providing a desired flow of preconditioned air through said connection hose.
3. The device according to claim 2, wherein said flow control means comprises a centrifugal blower or an ejector.
- 20 4. The device according to any one of the preceding claims, wherein said expander means is one of a turbine expander, a rotary screw expander and a displacement expander.
5. The device according to the preceding claim, comprising an electric generator or an ambient air compressor coupled to said expander means.
- 25 6. The device according to the preceding claim, wherein said ambient air

compressor has an outlet connected to said expander means.

7. The device according to any one of the preceding claims, wherein said device comprises a rolling support.
8. The device according to any one of the preceding claims, comprising
  - 5 two compressed air hoses having each a first end connected to a compressed air inlet and an opposite second end for connection to said ground-based, compressed air unit; and
  - two rotatable reel for winding and unwinding said compressed air hoses.
9. The device according to claim 8, comprising an electric, hydraulic or
  - 10 pneumatic motor coupled to each rotatable reel via a gearbox.
10. The device according to any one of the preceding claims, comprising an air filter downstream of said ambient air inlet.
11. The device according to any one of the preceding claims, wherein said expander means opens into an expansion chamber.
12. The device according to the preceding claim, wherein said expander means
  - 15 and said expansion chamber are mounted in an insulated casing.

Fig.1

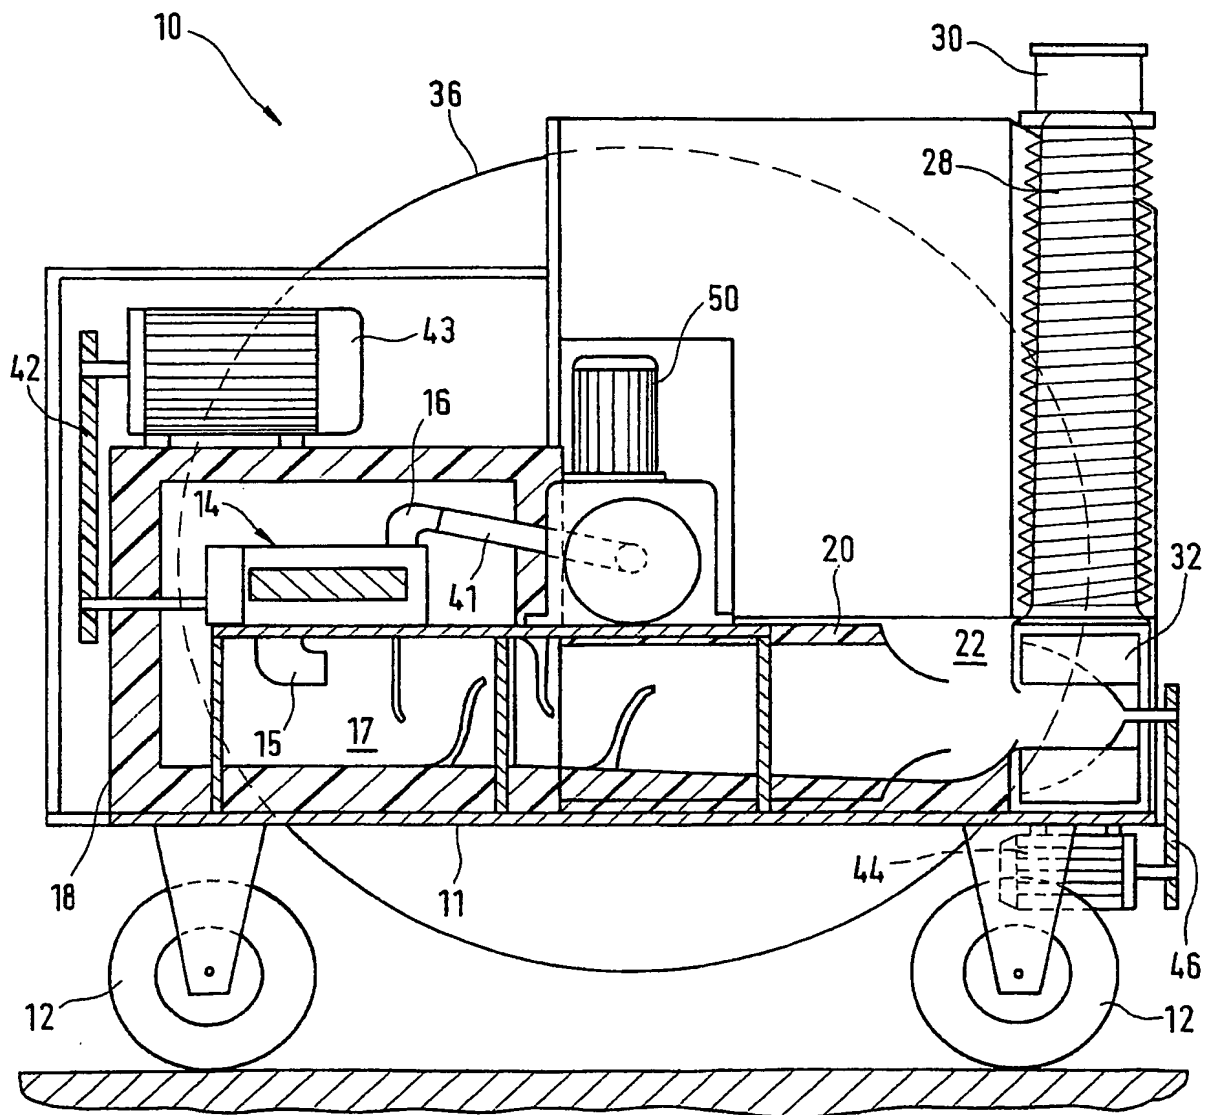

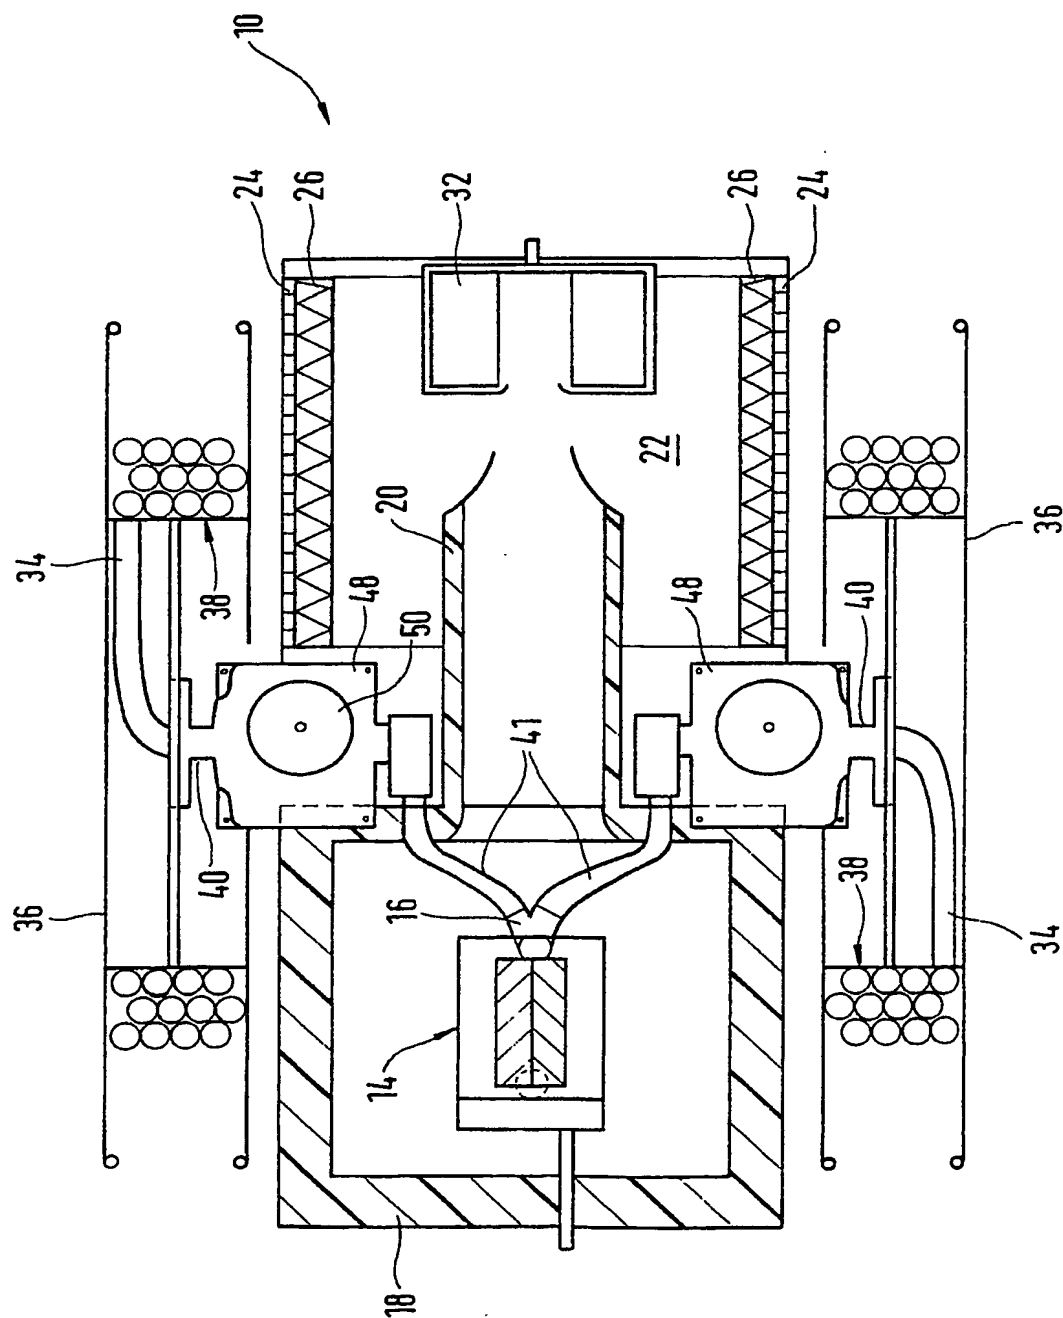


Fig. 2

## INTERNATIONAL SEARCH REPORT

International Application No.

PCT/03/50625

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 B64F1/00 F24F5/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 B64F F24F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB 772 473 A (GODFREY HANWORTH LTD) 17 April 1957 (1957-04-17) the whole document	1
A	EP 0 732 552 A (NHK SPRING CO LTD ;KAJIMA CORP (JP)) 18 September 1996 (1996-09-18) abstract figures 1-3	1
A	US 4 209 993 A (RANNENBERG GEORGE C) 1 July 1980 (1980-07-01) abstract figure 1	1
A	US 5 732 560 A (OEHRMAN HENRIK ET AL) 31 March 1998 (1998-03-31) abstract figures 1,2	4

-/-

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*&\* document member of the same patent family

Date of the actual completion of the international search

10 December 2003

Date of mailing of the international search report

30/12/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

De Graaf, J.D.



# INTERNATIONAL SEARCH REPORT

International Application No

PCT/03/50625

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P, A	PATENT ABSTRACTS OF JAPAN vol. 2002, no. 12, 12 December 2002 (2002-12-12) -& JP 2002 235961 A (SHIMADZU CORP), 23 August 2002 (2002-08-23) abstract	
A	----- US 2 585 570 A (MESSINGER BERNARD L ET AL) 12 February 1952 (1952-02-12)	
A	----- US 5 031 690 A (ANDERSON GORDON K ET AL) 16 July 1991 (1991-07-16) cited in the application	
A	----- GB 1 467 681 A (VER FLUGTECHNISCHE WERKE) 16 March 1977 (1977-03-16)	
A	----- US 4 251 994 A (REINHORN EDWIN) 24 February 1981 (1981-02-24) -----	

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/JP03/50625

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
GB 772473	A	17-04-1957	NONE	
EP 0732552	A	18-09-1996	JP 3045643 B2 JP 8105697 A JP 2715054 B2 JP 8110107 A JP 2977069 B2 JP 8110108 A CA 2178221 A1 EP 0732552 A1 NO 962299 A US 5823008 A WO 9611367 A1	29-05-2000 23-04-1996 16-02-1998 30-04-1996 10-11-1999 30-04-1996 18-04-1996 18-09-1996 02-08-1996 20-10-1998 18-04-1996
US 4209993	A	01-07-1980	BR 7901139 A CA 1093303 A1 DE 2907826 A1 DK 84179 A ,B, ES 478152 A1 FR 2419216 A1 GB 2015723 A ,B IL 56591 A IT 1111140 B NO 790538 A ,B, SE 435042 B SE 7901108 A US RE32100 E	20-11-1979 13-01-1981 13-09-1979 07-09-1979 16-05-1979 05-10-1979 12-09-1979 31-12-1981 13-01-1986 07-09-1979 03-09-1984 07-09-1979 01-04-1986
US 5732560	A	31-03-1998	SE 504967 C2 DE 69514936 D1 DE 69514936 T2 EP 0792434 A1 JP 10508937 T SE 9403966 A WO 9616302 A1	02-06-1997 09-03-2000 05-10-2000 03-09-1997 02-09-1998 18-05-1996 30-05-1996
JP 2002235961	A	23-08-2002	NONE	
US 2585570	A	12-02-1952	NONE	
US 5031690	A	16-07-1991	NONE	
GB 1467681	A	16-03-1977	DE 2325592 A1 DE 2413882 A1 DE 2414918 A1 FR 2229869 A2 JP 981476 C JP 50063315 A JP 54011843 B SE 405036 B SE 7406975 A US 3965673 A	05-12-1974 02-10-1975 16-10-1975 13-12-1974 27-12-1979 29-05-1975 18-05-1979 13-11-1978 23-09-1975 29-06-1976
US 4251994	A	24-02-1981	NONE	